

# SDM200/12VDC

## Magnetic Dimmable

Outdoor Black Powder Coated Steel Enclosure


Single Circuit: **12VDC**

Total Wattage: **200W max**

Input Voltage: **120V 60Hz**



Conforms to UL STD. 2108  
Certified to CSA  
STD. C22.2 No 250.0  
model EM150

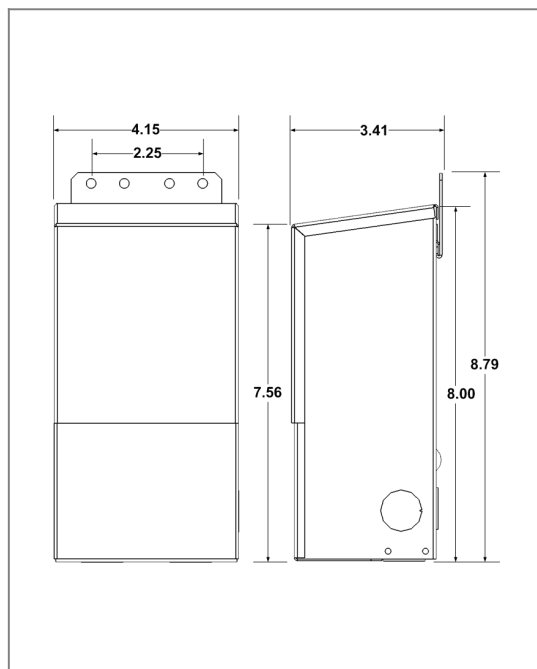

### Transformer

Dimmable with any MLV, CL dimmer, as long as, dimmer's min. load is covered.

Temperature class B(130°C)

Two section bobbin completely separated primary and secondary windings

Input leads are 18AWG 600V

Output leads are 12AWG 300V

Leads max. operational temperature is 105°C

Thermal manually reset primary breaker 3A

Thermal manually reset secondary breaker 25A

### Housing

The actual transformer 200W is encapsulated in the enclosure

The enclosure is Black Powder Coated Steel, NEMA 3R rated

Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 8, W = 4.15, D = 3.41

Weight (LBs): 7.4

### Electrical Parameters

Input Voltage: **120V 60Hz**

Max. input current at full load: **2A**


Output voltage without load: **13.2VDC**

Output voltage fully loaded: **11.8VDC**

Max. Total Wattage: **200W**

Max. Output Current: **16.7A**

Efficiency: **88%**

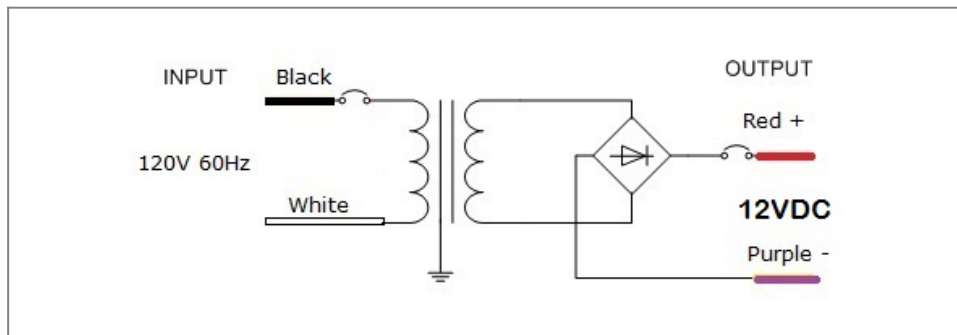

Mailing Address: 14826 Wrolson Lane Valders, WI 54245 940-773-3924  
info@centaurilighting.com